

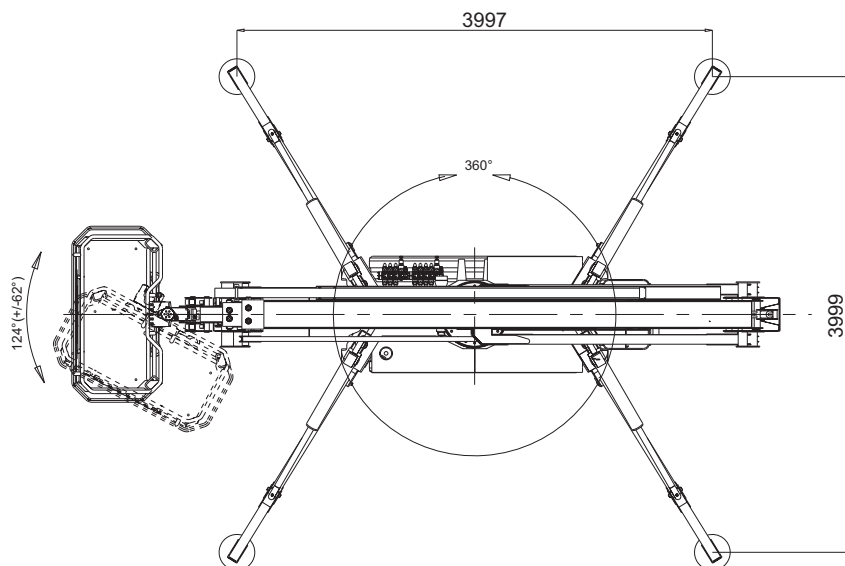
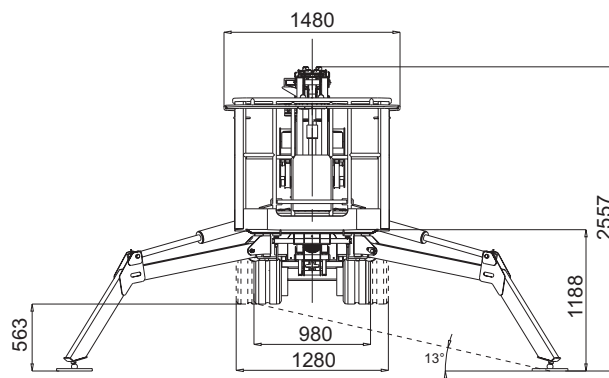
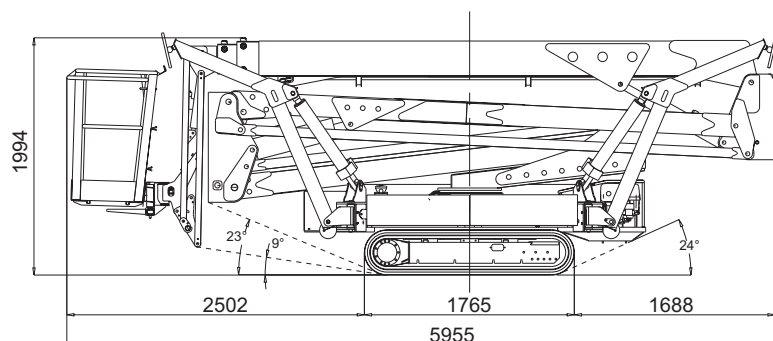


PLATFORM TECHNICAL DATA

	CAPACITY 200kg	CAPACITY 120kg
PLATFORM HEIGHT (floor)	19700mm	21120mm
MAX.WORKING HEIGHT	21780mm	23200mm
STANDARD BASKET DIMENSIONS	1300x600 H1100 mm	
HORIZONTAL REACH (WITHOUT BASKET ROTATION)	9610mm	11000mm
MAX. HORIZONTAL WORKING REACH (WITHOUT BASKET ROTATION): ..	10020mm	11400mm
SLEWING (not continuous)		360°
BASKET SLEWING		124°(+/-62°)
PLATFORM CAPACITY	200 kg	120 kg
N°. of OPERATORS	2	1
JIB-TIPO ARTICOLAZIONE	/	85°(-1°/-86°)
JIB-TYPE SWIVEL HEAD		1°/2,2%
TOTAL WEIGHT		3000 kg
THERMAL MOTOR:	HONDA iGX440-15CV-3600 rpm	
ELECTRIC MOTOR	2.2 kw/230V/50Hz monofase 1500 rpm	
ELECTRIC PLANT VOLTAGE	12 V	
PUMPS	2 x 4.27cc	
MAX. TRANSFER SPEED (Thermal engine)	(autotwospeed) 1.0/1.7 km/h	
STAB. PLANT PRESSURE	175 bar	
AERIAL PART PLANT PRESSURE	210 bar	
MAX. WIND SPEED	12,5 m/s	
MAX. ACCEPTED MANUAL FORCE	400 N	

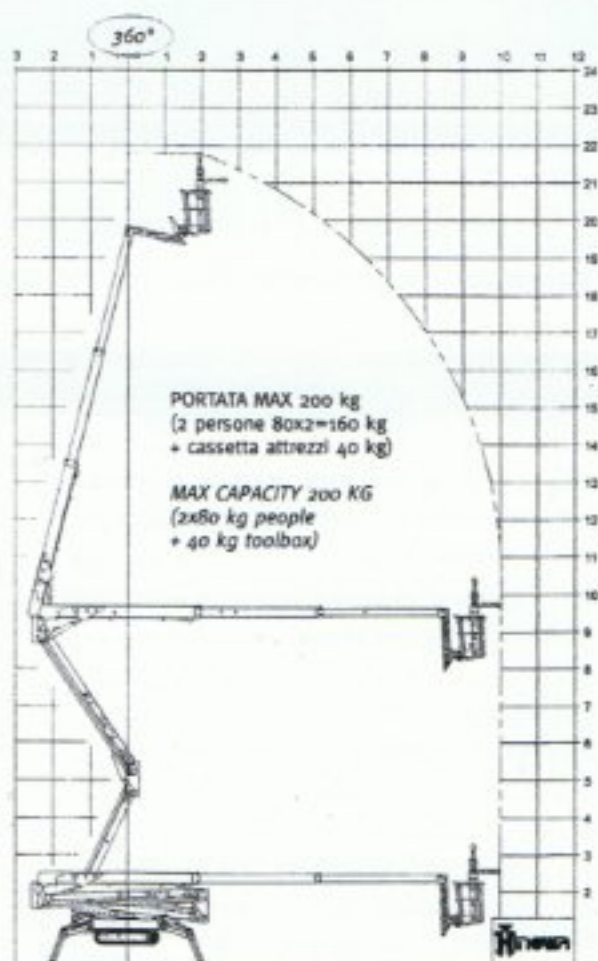

LIGHT LIFT 23.12

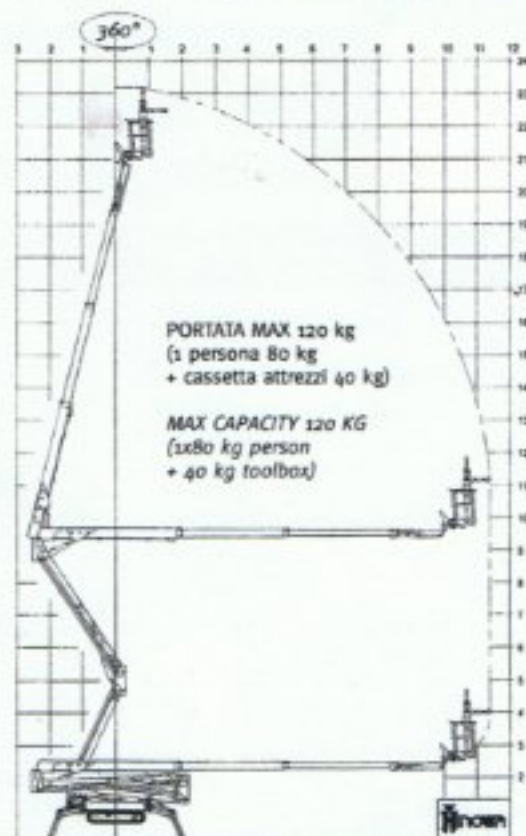

OPTIONAL ALTEZZA
RIDOTTA 1990
REDUCED HEIGHT
OPTIONAL 1990

